

Exercise 3: User Interface

PALM group

Institute of Meteorology and Climatology, Leibniz Universität Hannover


last update: 21st September 2015

Exercise 3: User Interface

- ▶ Carry out a run for a convective boundary layer where a surface heat flux is given for a limited rectangular area:


Exercise 3: User Interface

- ▶ Carry out a run for a convective boundary layer where a surface heat flux is given for a limited rectangular area:




Exercise 3: User Interface

- ▶ Carry out a run for a convective boundary layer where a surface heat flux is given for a limited rectangular area:




Exercise 3: User Interface

- ▶ Carry out a run for a convective boundary layer where a surface heat flux is given for a limited rectangular area:



Exercise 3: User Interface


- ▶ Carry out a run for a convective boundary layer where a surface heat flux is given for a limited rectangular area:



- ▶ It should be possible to control the area width d by a user-defined parameter in the parameter file. All other parameters should be chosen as in the example run (`example_cb1`). Chose a stripe width of $d = 300\text{m}$.

Exercise 3: User Interface


- ▶ Carry out a run for a convective boundary layer where a surface heat flux is given for a limited rectangular area:



- ▶ It should be possible to control the area width d by a user-defined parameter in the parameter file. All other parameters should be chosen as in the example run (`example_cb1`). Chose a stripe width of $d = 300\text{m}$.
- ▶ Create horizontal and vertical cross sections of variables in order to analyze the flow field.

Exercise 3: User Interface

- ▶ Carry out a run for a convective boundary layer where a surface heat flux is given for a limited rectangular area:



- ▶ It should be possible to control the area width d by a user-defined parameter in the parameter file. All other parameters should be chosen as in the example run (`example_cb1`). Chose a stripe width of $d = 300\text{m}$.
- ▶ Create horizontal and vertical cross sections of variables in order to analyze the flow field.

*Recommendations: Create mean vertical profiles of temperature and resolved/subgrid-scale heatflux for the total domain but also for the limited rectangular area and the total domain without the limited area. Also create time series for these three domains. This can be done by using the **statistic region concept** already implemented in PALM.*

The statistic region concept

- ▶ By default, mean horizontal profiles are calculated and output for the total domain.

The statistic region concept

- ▶ By default, mean horizontal profiles are calculated and output for the total domain.
- ▶ The user can define up to nine so-called statistic regions, which can be arbitrary subsets of the total domain and PALM will calculate and output mean profiles for these regions, too.

The statistic region concept

- ▶ By default, mean horizontal profiles are calculated and output for the total domain.
- ▶ The user can define up to nine so-called statistic regions, which can be arbitrary subsets of the total domain and PALM will calculate and output mean profiles for these regions, too.

Procedure:

1. Set the number of statistic regions you additionally want to define by assigning a value to the `&inipar`-parameter `statistic_regions`.

The statistic region concept

- ▶ By default, mean horizontal profiles are calculated and output for the total domain.
- ▶ The user can define up to nine so-called statistic regions, which can be arbitrary subsets of the total domain and PALM will calculate and output mean profiles for these regions, too.

Procedure:

1. Set the number of statistic regions you additionally want to define by assigning a value to the &inipar-parameter `statistic_regions`.
2. Within the user-interface (`user_init`), set the masking array `rmask`. It is an INTEGER array with array-bounds

```
rmask(nysg:nyng,nxlg:nxrg,0:statistic_regions)
```

The last index represents the respective statistic region (index 0 stands for total domain). Assign a 1 to each array element (grid point) which shall belong to the respective statistic region. `rmask` is pre-set as:

```
rmask(:, :, 0:statistic_regions) = 1
```

Additional hints

- ▶ Keep in mind that every PE calculates for a different subset of the total domain. Array bounds of the total domain are $(0:ny,0:nx)$, those of the subdomains $(nys:nyn,nx1:nxr)$, where nys , nyn , $nx1$, nxr vary for each subdomain.

Additional hints

- ▶ Keep in mind that every PE calculates for a different subset of the total domain. Array bounds of the total domain are $(0:ny,0:nx)$, those of the subdomains $(nys:nyn,nx1:nxr)$, where nys , nyn , $nx1$, nxr vary for each subdomain.
- ▶ `rmask` can also be used to modify the array which defines the surface heatflux (`shf`):

$$\text{shf} = \text{shf} * \text{rmask}(:, :, 1)$$

This sets the surface heatflux to zero at all those array elements (grid points) where `rmask(...,1)` is zero.

Additional hints

- ▶ Keep in mind that every PE calculates for a different subset of the total domain. Array bounds of the total domain are $(0:ny,0:nx)$, those of the subdomains $(nys:nyn,nx1:nxr)$, where nys , nyn , $nx1$, nxr vary for each subdomain.
- ▶ `rmask` can also be used to modify the array which defines the surface heatflux (`shf`):

$$\text{shf} = \text{shf} * \text{rmask}(:, :, 1)$$

This sets the surface heatflux to zero at all those array elements (grid points) where `rmask(...,1)` is zero.

- ▶ In case of using the default netCDF format, the profile data for the additional statistic regions are added to the default local file `DATA_1D_PR_NETCDF`.

Additional hints

- ▶ Keep in mind that every PE calculates for a different subset of the total domain. Array bounds of the total domain are $(0:ny,0:nx)$, those of the subdomains $(nys:nyn,nx1:nxr)$, where nys , nyn , $nx1$, nxr vary for each subdomain.
- ▶ `rmask` can also be used to modify the array which defines the surface heatflux (`shf`):


$$\text{shf} = \text{shf} * \text{rmask}(:, :, 1)$$

This sets the surface heatflux to zero at all those array elements (grid points) where `rmask(...,1)` is zero.

- ▶ In case of using the default netCDF format, the profile data for the additional statistic regions are added to the default local file `DATA_1D_PR_NETCDF`.
- ▶ The developing mean flow is quasi two-dimensional (in the xz -plane). You can easily get plots of the mean flow by averaging results along the y -axis. The standard output provides such averages. See description of parameter [section_xz](#) on how to get averages along y .

Bonus (if you finished the exercise very fast):



- ▶ Repeat the simulation, but now for a geostrophic wind of 0.5 m s^{-1} (Consider the wind direction!)
- ▶ The resulting flow will be quite similar to the flow over an arctic lead

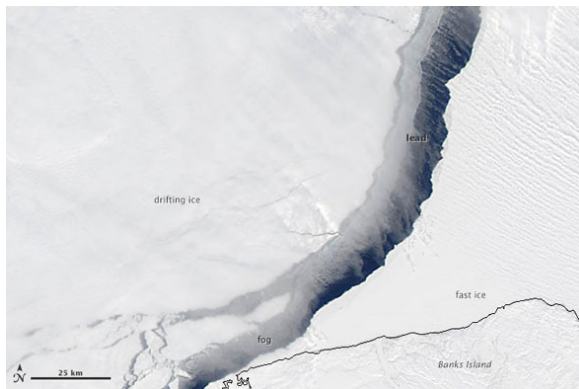

← Image courtesy: NASA, 2013




xy cross-sections: vertical velocity and surface heat flux

PALM 4.0 Rev: 1634M run: example_interface.00 host: lcair 31-08-15 22:14:45

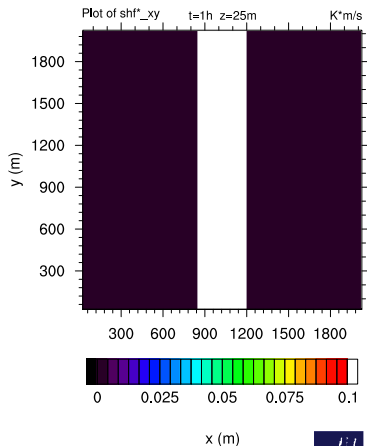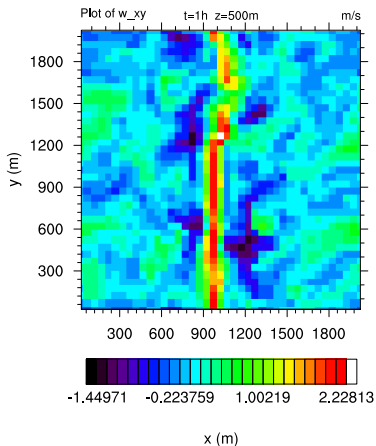



vertical profiles: potential temperature

PALM 4.0 Rev: 1634M run: example_interface.00 host: lcair 31-08-15 22:14:45, 600.0 s average



xz cross-sections: vertical velocity

PALM 4.0 Rev: 1634M run: example_interface.00 host: lcair 31-08-15 22:14:45, 900.0 s average


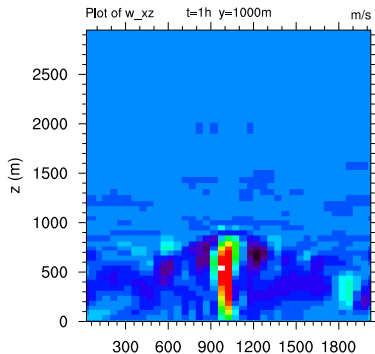
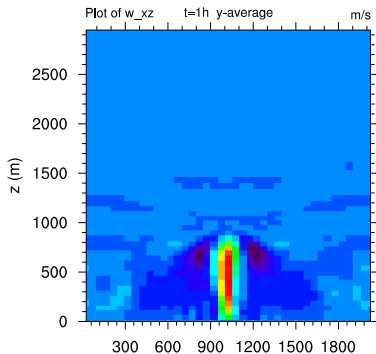


x (m)

x (m)




vertical profiles: resolved vertical heat flux

PALM 4.0 Rev: 1634M run: example_interface.00 host: lcair 31-08-15 22:14:45, 600.0 s average






vertical profiles: subgrid scale vertical heat flux

PALM 4.0 Rev: 1634M run: example_interface.00 host: lcair 31-08-15 22:14:45, 600.0 s average



time series: potential temperature and vertical heat flux

PALM 4.0 Rev: 1634M run: example_interface.00 host: lcair 31-08-15 22:14:45 time series

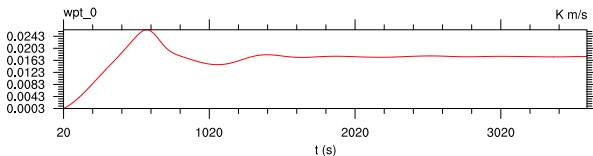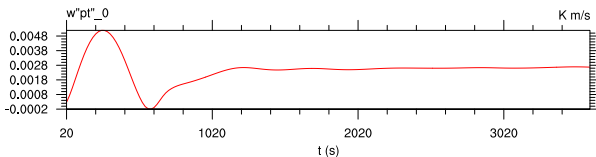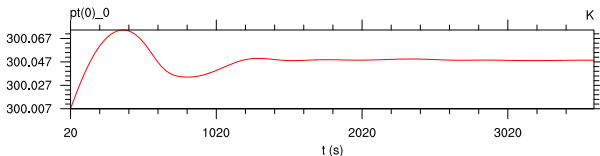

Bonus: xz cross-sections: vertical velocity

PALM 4.0 Rev: 1634M run: example_interface.00 host: lcair 31-08-15 23:11:52

